



**Europäisches  
Patentamt**

**European  
Patent Office**

**Office européen  
des brevets**

**Bescheinigung**

**Certificate**

**Attestation**

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

**Patentanmeldung Nr.    Patent application No.    Demande de brevet n°**

03100989.7

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

**R C van Dijk**

THIS PAGE BLANK (USP 10)



Anmeldung Nr:  
Application no.: 03100989.7  
Demande no:

Anmeldetag:  
Date of filing: 11.04.03  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Thomson Licensing S.A.  
46, Quai Alphonse Le Gallo  
92100 Boulogne Billancourt  
FRANCE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se référer à la description.)

Video apparatus with a receiver and processing means

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

H04N7/00

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL  
PT SE SI SK TR LI

**THIS PAGE BLANK (USPTO)**

The invention relates to a video apparatus with a receiver and processing means.

A video apparatus often comprises a receiver which is meant to produce a video signal (e.g. an analogue video signal according to the NTSC or PAL standard) based on an RF signal received from a remote  
5 broadcaster.

It becomes common practice nowadays to provide such a video apparatus with an encoder (e.g. a MPEG encoder) in order to convert the received video signal into an encoded stream (e.g. a MPEG encoded  
10 digital stream).

This is useful notably to record the received video sequence as a digital stream on a medium, for instance on a DVD or on a hard-disk drive located in the apparatus.

A problem in such a system is that the received video signal may  
15 be noisy and may lead therefore to an encoded stream with defects (artefacts). These defects clearly appear as macro-blocks when the video sequence coded by the encoded stream is displayed.

In order to avoid appearance of these artefacts, the video signal is sometimes processed in a specific way ; for instance, the video signal is  
20 processed through a low-pass filter before being encoded. However, this specific processing generally has some limitations or drawbacks ; for instance, the low-pass filter removes the details of the video sequence (high frequency part of the video signal), even when the received video signal has a good quality (good signal-to-noise ratio) and would lead to  
25 correct encoding with a weaker low-pass filter keeping more details.

In order to avoid encoding defects while keeping the video signal untouched as far as possible, the invention proposes a video apparatus comprising a receiver for converting an RF signal into a video signal, processing means receiving the video signal and outputting an encoded  
30 stream based on the video signal, an indicator of a characteristic of the

RF signal and control means for adjusting the processing means based on the indicator.

It is thus possible to adjust the processing depending on the received RF signal, for instance depending on its amplitude and/or quality, to best match the treatment needed by the signal.

According to a advantageous embodiment, the processing means includes an adjustable filter and the control means includes means for adjusting the adjustable filter based on the indicator.

The receiver outputs for instance the video signal as an analogue signal and a video decoder converts the analogue signal into a digital stream.

The adjustable filter is for instance part of the video decoder.

According to another possible solution, that may be combined with the previous one, the processing means includes an encoder having an adjustable encoding bit-rate and the control means includes means for adjusting the encoding bit-rate based on the indicator.

The characteristic is for instance the amplitude of the RF signal.

The indicator may be a voltage controlling the gain of an amplifier of the receiver. Effectively, the gain of the amplifier is generally controlled to be inversely proportional to the RF signal amplitude and can therefore be taken as an indicator of the RF signal strength.

When the receiver comprises a tuner which outputs an IF signal, the indicator may also be the amplitude of the IF signal.

According to a advantageous embodiment, the control means comprises a micro-processor. The micro-processor preferably has means for receiving a signal representative of the indicator and means for sending control data to adjust the processing means.

Other features of the invention will appear in the below description made in reference to :

- Figure 1 representing a video apparatus according to a first embodiment of the invention ;

- Figure 2 detailing the front-end of the video apparatus of Figure 1 ;

- Figure 3 detailing the video decoder of the video apparatus of Figure 1 ;

5        - Figure 4 representing a video apparatus according to a second embodiment of the invention.

The video apparatus of Figure 1 receives an RF signal (radio frequency signal) on an antenna 2. A tuner 4 converts the RF signal at a selected frequency to a signal IF at the intermediate frequency. The  
10       selected frequency is determined by frequency data FREQ received from a main micro-processor 14 of the video apparatus over a tuner bus and corresponds to a channel for the user.

The signal IF at the intermediate frequency is converted into an analogue base band video signal CVBS by a demodulator 6. This  
15       analogue video signal is a viewable signal, for instance a PAL-,SECAM- or NTSC-formatted analogue video signal.

The tuner 4 and the demodulator 6 are implemented together in a front-end 5 which forms the essential element of the receiver.

A detailed view of the front-end 5 is represented on Figure 2.

20       The tuner 4 has a first band-pass filter (BPF) 41 filtering the incoming RF signal. The filtered RF signal is then amplified by an automatic gain controlled (AGC) amplifier 42, which gain is controlled by a control signal AGC (generally called the AGC feedback voltage) from the demodulator 6 as further explained below.

25       The amplified RF signal 42 goes through a second band-pass filter 43 to get to a mixer 44 where it is mixed with a frequency defined by the frequency data FREQ (based on user selection) so that the signal at the selected frequency (selected channel) is output from the tuner 4 at the intermediate frequency IF (IF signal).

30       The IF signal is then processed through the demodulator 6, *i.e.* roughly speaking through a third band-pass filter 51 and an amplifier

52, into an analogue video signal CVBS. Based on this analogue video signal CVBS, and notably on the amplitude of this analogue video signal CVBS, the AGC feedback voltage (control signal AGC for the AGC amplifier 42) is generated by an AGC generator 53.

5 The theoretical purpose of the AGC amplifier 42 is to get a constant amplitude or envelope of the output analogue video signal CVBS whatever the level (or amplitude) of the received RF signal. This aim is generally reached by adapting the gain of the AGC amplifier 42 thanks to the AGC generator 53, depending on the amplitude of the analogue  
10 video signal CVBS (according to the feedback principle).

However, the AGC amplifier 42 practically has a limited range and the low and very low RF signals cannot consequently be amplified to the desired amplitude in the analogue video signal CVBS. In such a case, the AGC generator consequently keeps on requesting the maximum  
15 possible amplification and correspondingly sends out a high level AGC feedback voltage, for instance 3.8 V.

For these reasons, when the RF signal is above 60 dB $\mu$ V, the AGC gain of AGC amplifier 42 is controlled by varying the AGC feedback voltage below 3.8 V to get a roughly constant envelope of the output  
20 video signal CVBS (which corresponds to an IF signal of 102 dB $\mu$ V). When the RF signal is below 60 dB $\mu$ V, the gain of AGC amplifier 42 is controlled to be maximum, by transmitting an AGC feedback voltage of 3.8 V.

Back to Figure 1, the analogue video signal CVBS output by the  
25 demodulator 6 is transmitted to a video decoder 8 (e.g. one of the Philips SAA711x family) which converts it into a digital video stream YCrCb, for instance as a 4:2:2 stream. An exemplary video decoder 8 is represented on Figure 3.

The incoming analogue video signal CVBS is converted into an  
30 unprocessed digital stream Y+C by an analogue-to-digital converter (ADC) 81. A comb filter 82 separates the chrominance from the



unprocessed digital stream  $Y+C$  and outputs an unprocessed chrominance stream  $C$ . The unprocessed chrominance stream  $C$  is notably passed to a subtractor 83 to be subtracted from the unprocessed digital stream  $Y+C$  in order to output the unprocessed  
5 luminance stream  $Y$ .

The unprocessed luminance stream  $Y$  is processed through a luminance filter block 84 which can be operated as an adjustable sharpness filter. The luminance or sharpness filter is adjusted according to control data (parameter  $LUF[3:0]$  for the Philips SAA711x family)  
10 received from the main micro-processor 14 over a decoder bus  $DEC\_BUS$  as explained below.

The unprocessed chrominance stream  $C$  is processed through a chrominance processing block 85 which notably separates the two chrominance components  $U$  and  $V$ .

15 The processed luminance stream and chrominance streams  $U$ ,  $V$  are received by a multiplexer block 86 which combines them into a digital video stream  $YCrCb$ . The multiplexer block 86 may also provide further processing of the digital stream, such as saturation control.

The digital video stream  $YCrCb$  is encoded into a MPEG stream by  
20 an MPEG encoder 10. The MPEG stream is then ready to be recorded on a medium 12.

The main micro-processor 14 receives the AGC feedback voltage from the demodulator 6 and sets the control data for the adjustable sharpness filter depending on the gain.

25 As explained above, when the AGC feedback voltage  $AGC$  is low, for instance below 3.5 V, a strong RF signal is received and the signal-to-noise ratio is good ; the main micro-processor then sets the control data and consequently the adjustable sharpness filter to light filtering.

When the AGC feedback voltage is high, for instance above 3.5 V,  
30 the received RF signal is low and a poor signal-to-noise ratio is expected ; the main micro-processor 14 then sets the control data and

consequently the adjustable sharpness filter to strong filtering of the high frequency components of the pictures.

The table below gives an example of the adjustment of the sharpness filter of the video decoder 8 depending on the gain of the amplifier of the tuner 4, for an encoding bit-rate of 3.7 Mbps (which can be used for Long Play recording). This look-up table is stored in a memory linked to the main micro-processor 14.

| AGC feedback voltage | Control data to video decoder<br>(for sharpness filter selection) |
|----------------------|---|
| Below 3.5 V          | LUFI[3:0] = 0000  |
| Above 3.5 V          | LUFI[3:0] = 1011  |

Figure 4 represents a second embodiment of the invention. Reference should be made to the above description of Figures 1 to 3 for parts which are unchanged.

In the second embodiment, an envelope detector 9 generates a envelope voltage IF\_AMP representative of the amplitude (or envelope) of the IF signal output from the tuner 4. The envelope voltage IF\_AMP is received on a pin of the main micro-processor 14.

The main micro-processor 14 adjusts the adjustable sharpness filter of the decoder 8 (*i.e.* sends out control data on the decoder bus DEC\_BUS adjusting the sharpness filter) depending on the envelope voltage IF\_AMP.

As previously explained, when the RF signal is above 60 dB $\mu$ V, the AGC amplifier 42 is controlled to output a nominal value, which corresponds to an IF signal having an amplitude of 102 dB $\mu$ V. A value of envelope voltage IF\_AMP corresponding to 102 dB $\mu$ V is thus indicative of a strong received signal and presumably a good signal-to-noise ratio.

When the RF signal is below 60 dB $\mu$ V, the AGC amplifier 42 is controlled to full amplification (about 42 dB) as discussed above but this will deliver an IF signal lower than 102 dB $\mu$ V. As for RF signals below 60

dB $\mu$ V the amplification ratio is constant (maximal, *i.e.* about 42 dB), the envelope of the IF signal is a good indicator of the strength of the received RF signal. The envelope voltage IF\_AMP below a value corresponding to 102 dB $\mu$ V is therefore indicative of a small RF signal and the accurate value is indicative of how small the RF signal is.

The below table can be used for instance to control the adjustable sharpness filter of the decoder 8 depending on the envelope voltage IF\_AMP indicative of the strength (or amplitude) of the RF signal.

| IF signal envelope according to envelope voltage IF_AMP | Control data to video decoder (for sharpness filter selection) |
|---|--|
| 102 dB $\mu$ V  | LUFI[3:0] = 0000   |
| 97 dB $\mu$ V   | LUFI[3:0] = 1011   |
| 87 dB $\mu$ V   | LUFI[3:0] = 1100   |

The invention is of course not limited to the embodiments which have been described above.

Notably, other parameters of the receiver can be used instead of the gain of an amplifier as an indicator of the reception quality.

Similarly, the operating parameter of the receiver can be transmitted by other means than described above. For instance, the operating parameter which is used as an indicator of the reception quality can be transmitted over the tuner bus.

Besides, the invention does not specify whether the filter is analogue or digital. The adjustable filter can consequently act before or after analogue-to-digital conversion.

As already indicated, other parts of the processing means than the adjustable filter can be adjusted depending on the receiver parameter : the encoding bit-rate of the encoder can for instance be adjusted based on the receiver parameter. Similarly, other filters, such as a filter for luminance/chrominance noise reduction in the MPEG encoder 10, can be used.

35 PAGE BLANK (USPTO)

## CLAIMS

1. Video apparatus comprising :

- 5    - a receiver (5 ; 5, 8) for converting an RF signal (RF) into a video signal (CVBS ; YCrCb) ;
- processing means (8 ; 10) receiving the video signal (CVBS ; YCrCb) and outputting an encoded stream (YCrCb ; MPEG) based on the video signal (CBVS ; YCrCb) ;
- 10   characterised by
- an indicator (AGC ; IF\_AMP) of a characteristic of the RF signal (RF) ;
- control means (14) for adjusting the processing means (8 ; 10) based on the indicator (AGC ; IF\_AMP).
- 15   2. Video apparatus according to claim 1, wherein the processing means (8 ; 10) includes an adjustable filter (84) and wherein the control means (14) includes means for adjusting the adjustable filter (84) based on the indicator (AGC ; IF\_AMP).
- 20   3. Video apparatus according to claim 2, wherein the receiver (5) outputs the video signal (CVBS) as an analogue signal and wherein a video decoder (8) converts the analogue signal (CVBS) into a digital stream (YCrCb).
- 25   4. Video apparatus according to claim 3, wherein the video decoder (8) comprises the adjustable filter (84).
5. Video apparatus according to claim 1, wherein the processing means includes an encoder (10) having an adjustable encoding bit-rate and
- 30   wherein the control means (14) includes means for adjusting the encoding bit-rate based on the indicator (AGC ; IF\_AMP).

6. Video apparatus according to any of claims 1 to 5, wherein the characteristic is the amplitude of the RF signal (RF).

5 7. Video apparatus according to any of claims 1 to 6, wherein the indicator is a voltage (AGC) controlling the gain of an amplifier (42) of the receiver (5 ; 5, 8).

10 8. Video apparatus according to any of claims 1 to 6, wherein the receiver comprises a tuner (4) which outputs an IF signal (IF) and wherein the indicator (IF\_AMP) is the amplitude of the IF signal (IF).

9. Video apparatus according to any of claims 1 to 8, wherein the control means comprises a micro-processor (14).

15 10. Video apparatus according to claim 9, wherein the micro-processor (14) has means for receiving a signal representative of the indicator (AGC ; IF\_AMP) and means (DEC\_BUS) for sending control data to adjust the processing means (8).

20

## **Video apparatus with a receiver and processing means**

### **Abstract**

A video apparatus has a receiver (5) for receiving and converting an RF signal (RF) into a video signal (CVBS ; YCrCb). The video signal (CVBS ; YCrCb) is then processed (notably encoded) into an encoded digital stream (MPEG) by processing means (8 ; 10). The processing means (8 ; 10) is adjusted based on an indicator (AGC) of a characteristic of the RF signal (RF).

**Figure 1**

**THIS PAGE BLANK (USPTO)**



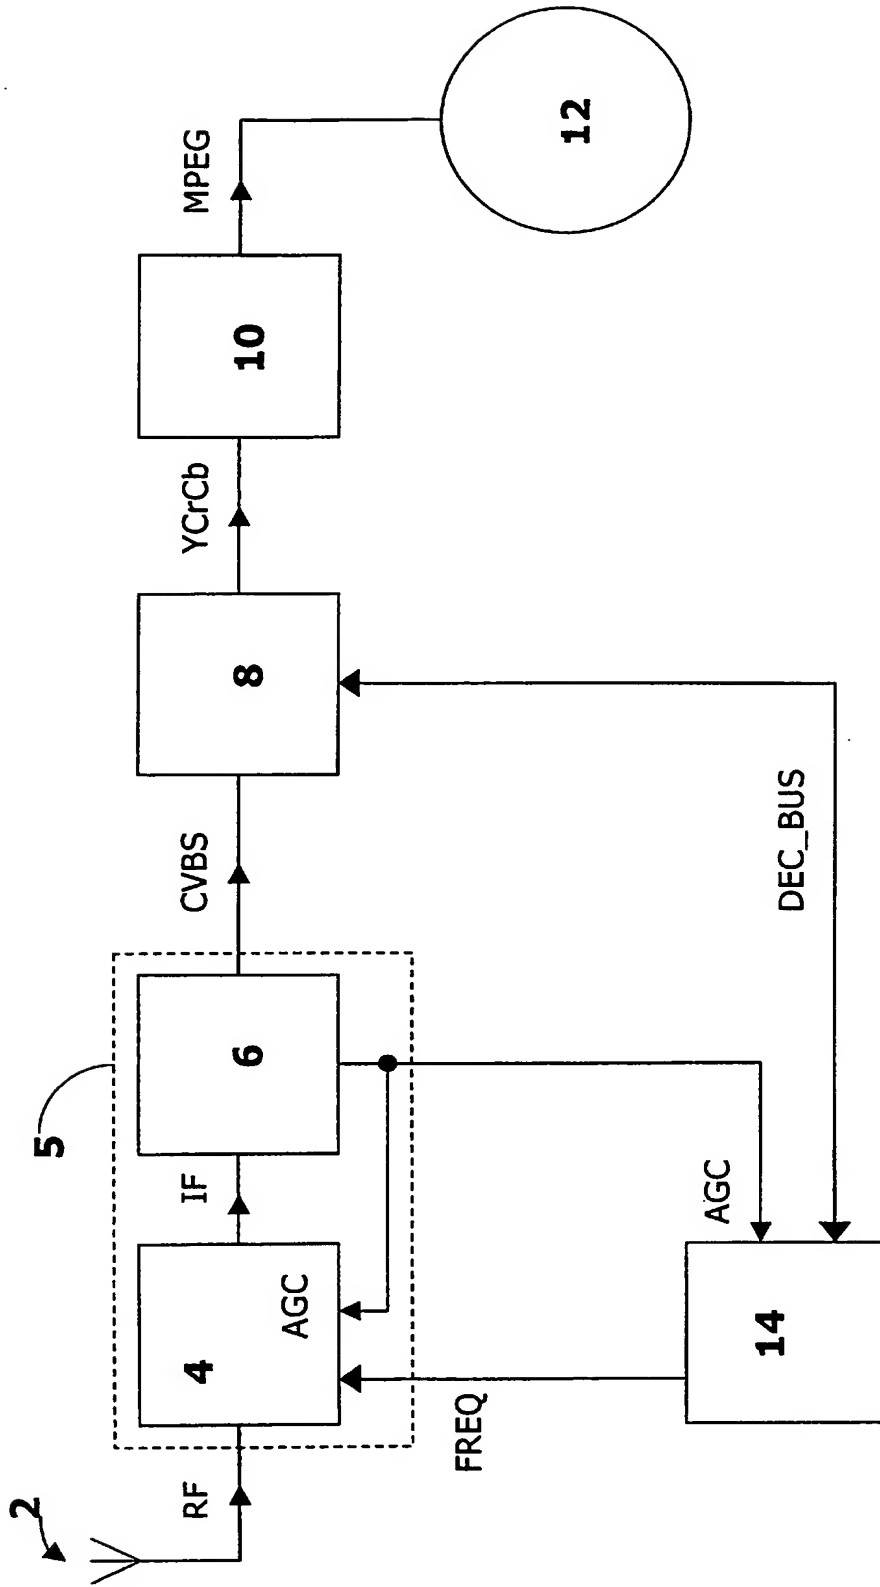


Fig. 1

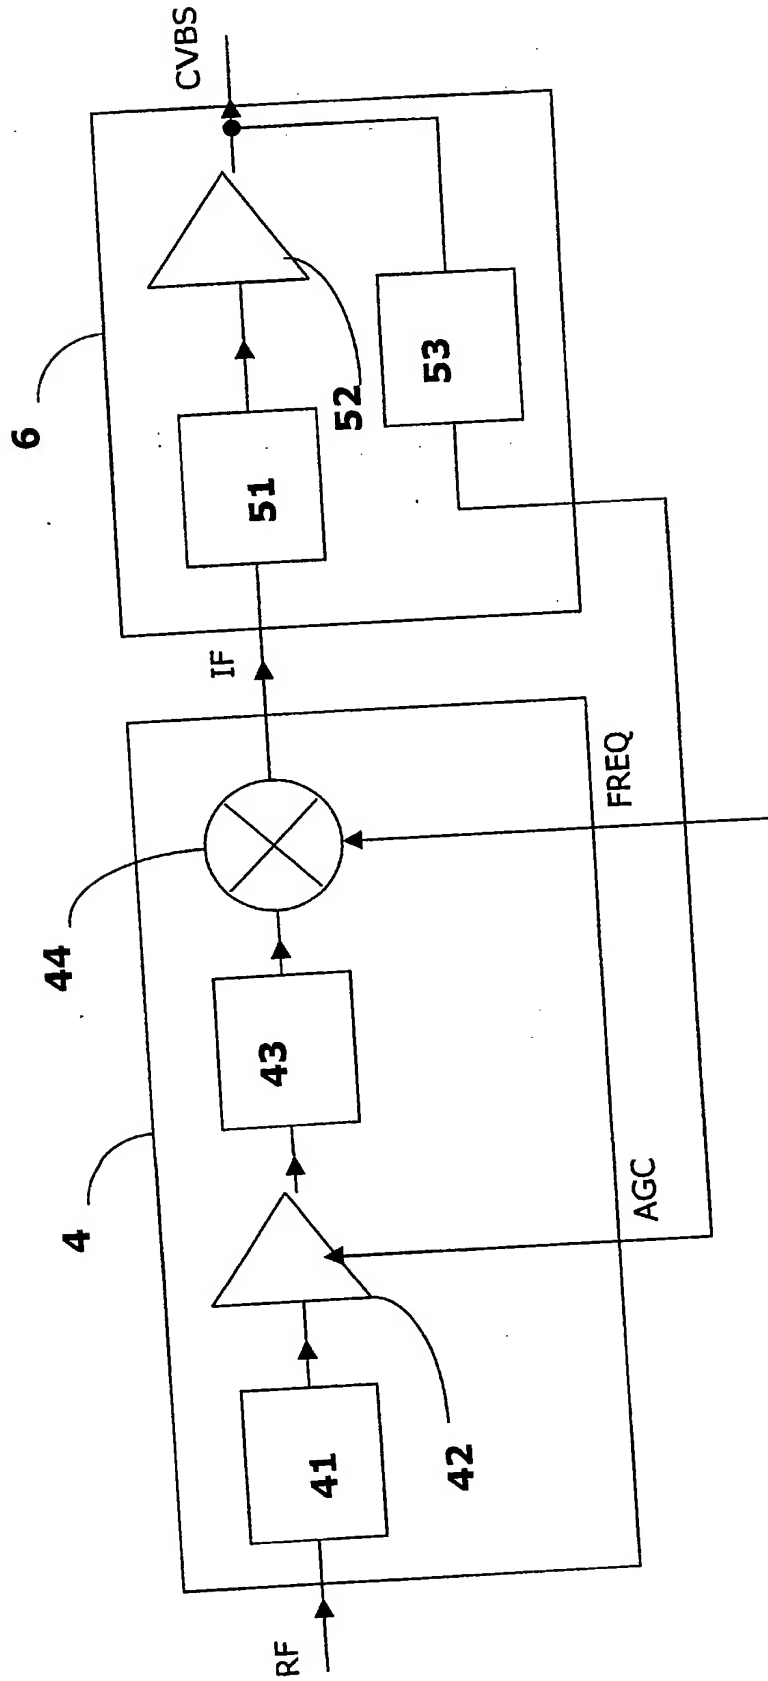


Fig. 2

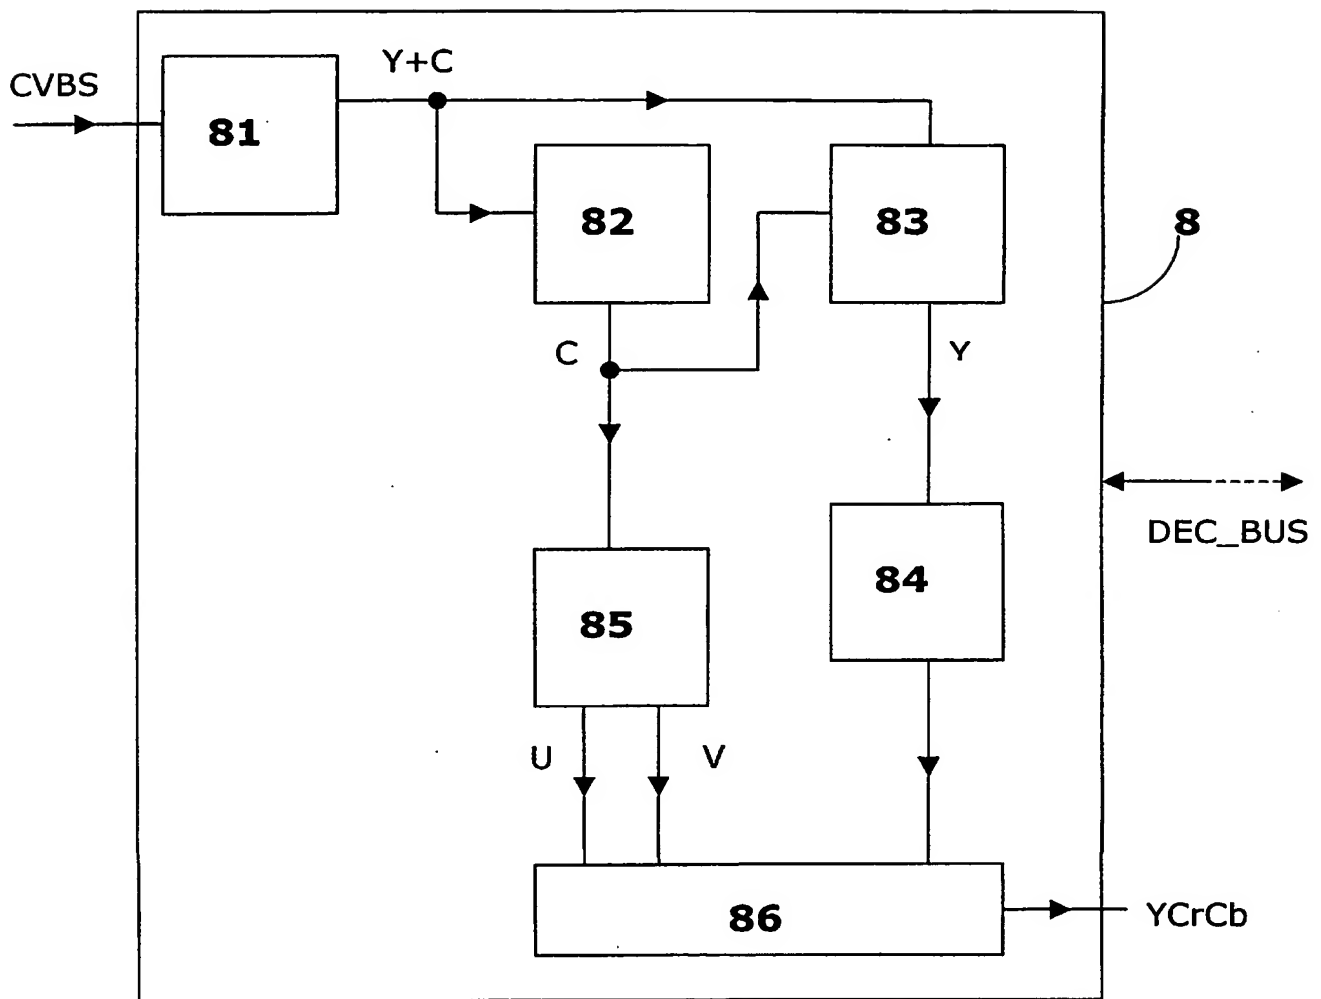


Fig. 3

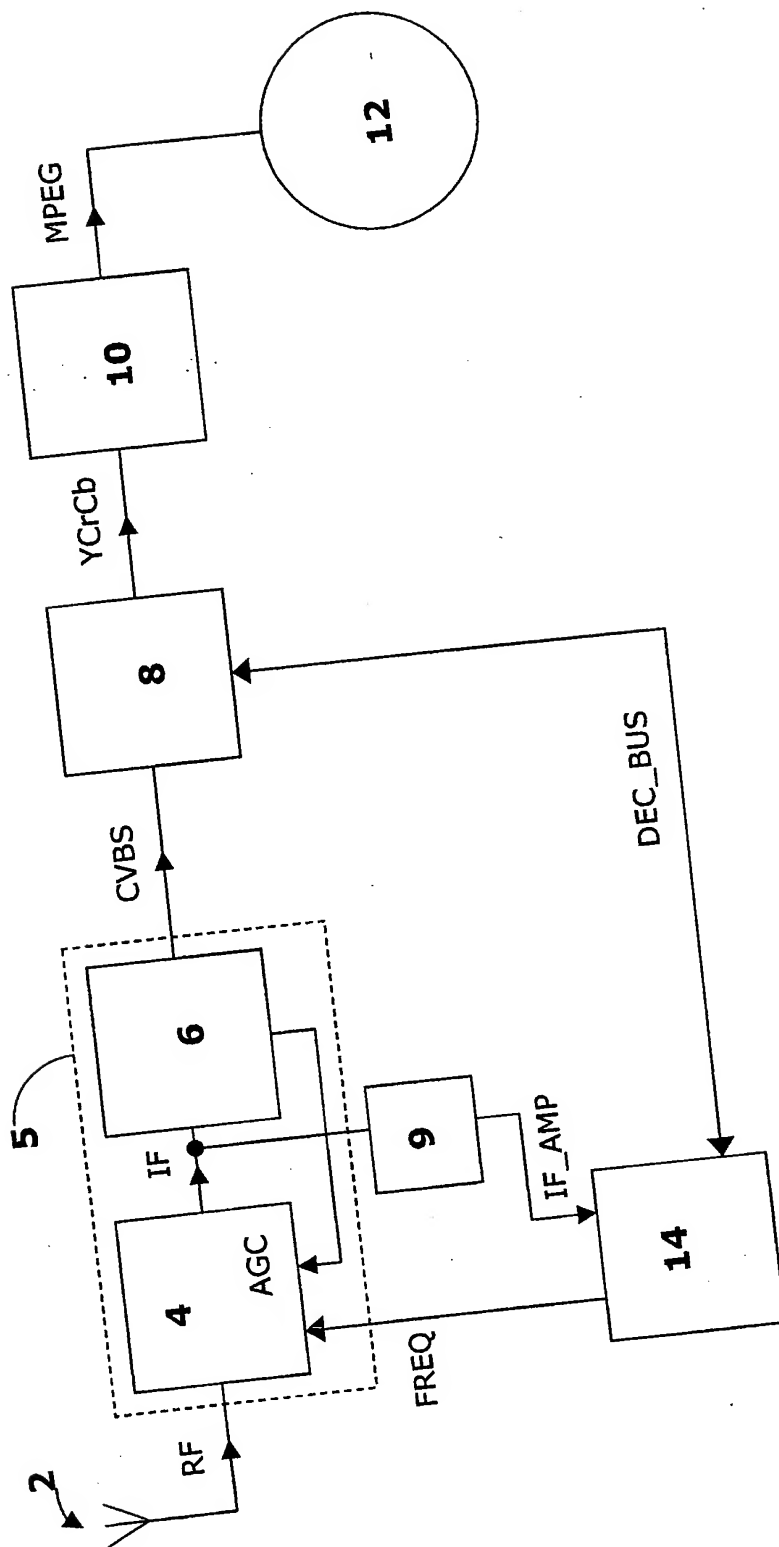


Fig. 4